



# PILOT OPTD. PR. REDUCING VALVE MODULAR ONSTRUCTION MPPM 06

ENGINEERING

1

Ref. No. P09247  
Release 06/2003

## Description


Pilot optd. pressure reducing valve modular construction for vertical stacking assemblies.

For Cartridge Valve details refer P09605

Interface conforming to  
ISO 4401 - AB - 03 - 04 - A  
IS 10187  
DIN 24340  
Four models available.



## Section

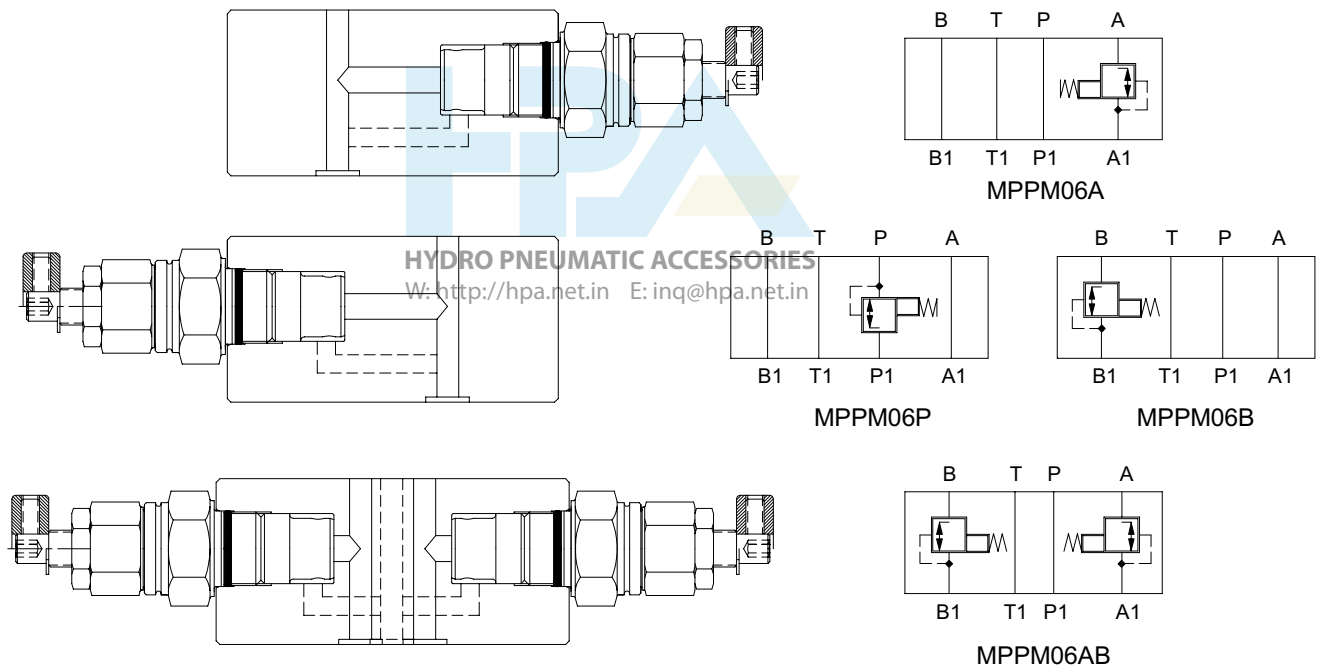

Hydraulic Symbol

**Polyhydron Pvt. Ltd.**  
78-80, Machhe Industrial Estate,  
Machhe, Belgaum - 590 014. INDIA.

**Phone** : +91-(0)831-411001  
**Fax** : +91-(0)831-411002  
**E-mail** : [polyhydron@vsnl.com](mailto:polyhydron@vsnl.com)  
**Website** : [www.polyhydron.com](http://www.polyhydron.com)



PILOT OPTD. PR. REDUCING  
VALVE MODULAR ONSTRUCTION  
**MPPM 06**


ENGINEERING

2


Ref. No. P09247

Unit dimension

Dimensions in mm

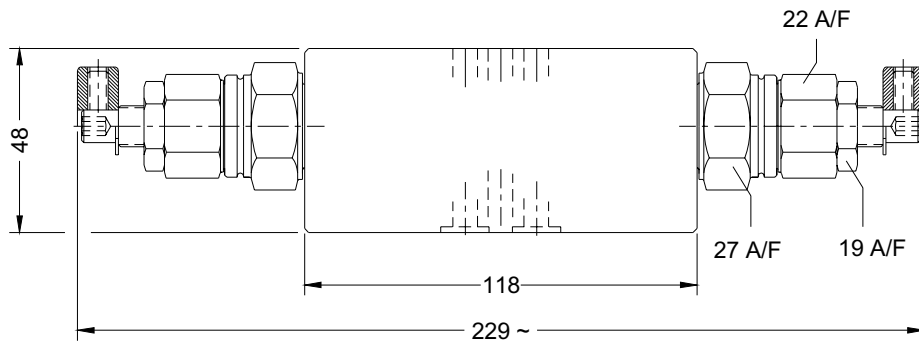


**MPPM06AB**

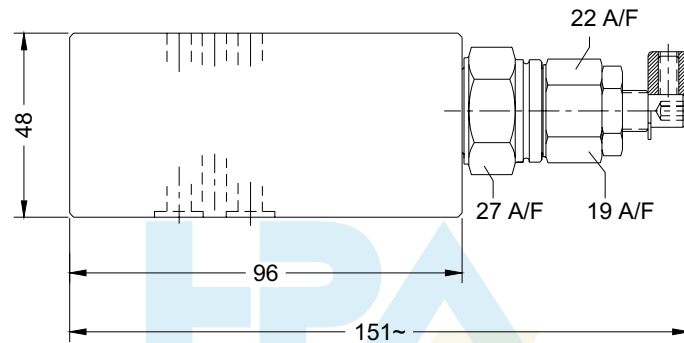


**MPPM06A**

HYDRO PNEUMATIC ACCESSORIES

W: <http://hpa.net.in> E: [inq@hpa.net.in](mailto:inq@hpa.net.in)

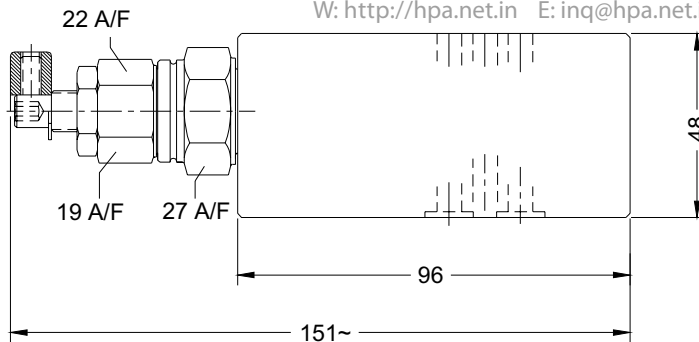

**MPPM06P / MPPM06B**

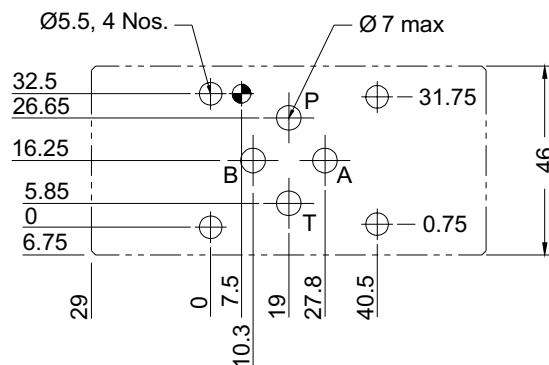

Interface



PILOT OPTD. PR. REDUCING  
VALVE MODULAR ONSTRUCTION  
**MPPM 06**

ENGINEERING


3

Ref. No. P09247

**Technical specification**

Construction .....	Modular(stackable type)
Mounting .....	Modular type, conforming to - IS 10187 ISO 4401 - AB - 03 - 4 - A DIN 24340
Mounting position .....	Optional
Direction of flow .....	As indicated by the hydraulic symbols.
Operating pressure .....	315 bar for all ports.
Cracking pressure .....	Refer PPR06 datasheet
Voscosity range .....	10 cSt to 380 cSt.
Fluid temperature range .....	-10 °C to +80 °C
Nominal flow handling capacity .....	30 lpm

**Ordering code**

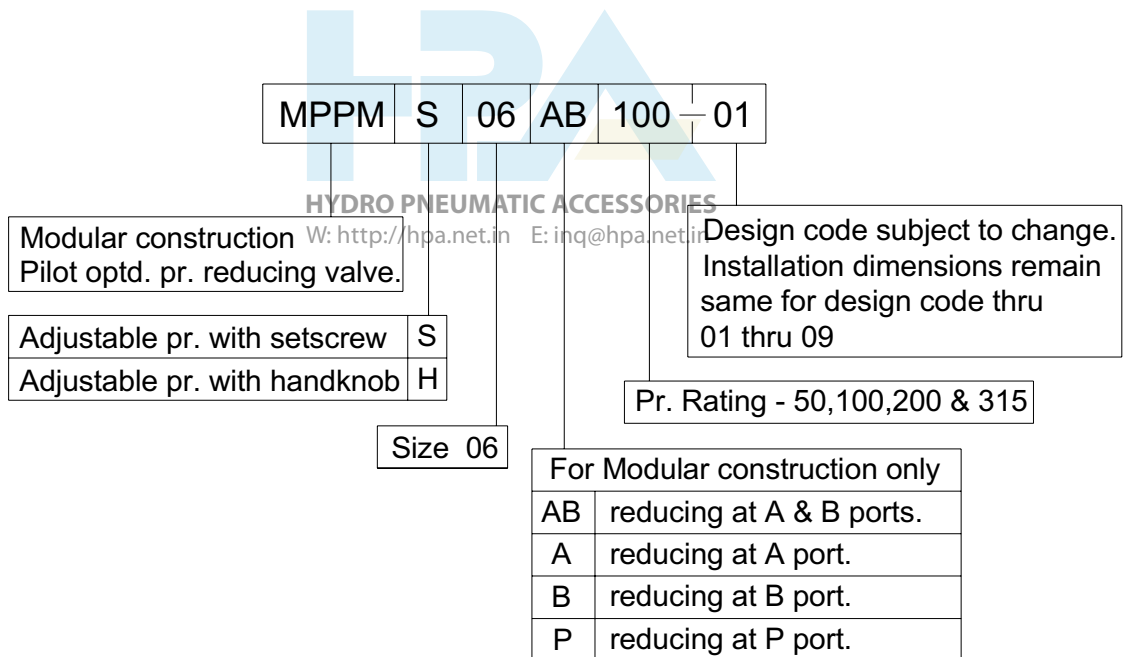

All rights reserved.  
Subject to revision.